

RG-EW1200R 1200Mbps Dual-band Mesh Wi-Fi Extender


DATASHEET



Highlights

- Cover your whole home network with one-click
- Unbreakable Wi-Fi signal throughout your Home
- Three-bar signal indicator guides you to find the best spot
- Reyee Mesh brings you unlimited signal connection everywhere you go
- More wireless mode options, more surprise
- Take control of your home network at your fingertips

Highlight Features

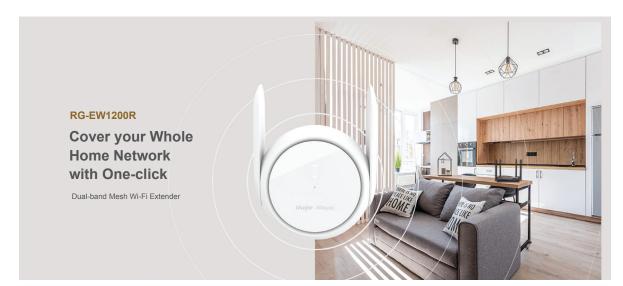





Highlight Features





Highlight Features





Basic	
Dimensions (W×D×H)	128 mm x 102 mm x 60 mm (5.04 in. × 4.02 in. × 2.36 in. antennas not included)
Weight	0.25 kg (packages not included)
Wi-Fi Standards	Wi-Fi 5 (802.11ac)
MIMO	2.4 GHz, 2×2, MU-MIMO 5 GHz, 2×2, MU-MIMO
Max. Wi-Fi Speed	2.4 GHz: 300 Mbps 5 GHz: 867 Mbps
Channel Width	2.4 GHz: Auto/20/40 MHz 5 GHz: Auto/20/40/80 MHz
Antennas	2
Antennas Type	External Omnidirectional
Antenna Gain	2.4 GHz: 4 dBi 5 GHz: 4 dBi
Port	1×10/100 Base-T WAN/LAN
Recommended Users	24
Max. Users	96
Power Supply	100-240V~50/60Hz 0.5A
Power Consumption	≤15W
Operation Frequency Bands	802.11b/g/n/: 2.400 GHz to 2.483 GHz 802.11a/n/ac: 5.150 GHz to 5.350 GHz 802.11a/n/ac: 5.470 GHz to 5.725 GHz , 5.725 GHz to 5.850 GHz country-specific restrictions apply
Transmit Power	Regular: CE EIRP: ≤20dBm (2.4GHz) ≤27dBm (5GHz) ≤20dBm 2400~2483.5MHz(Bluetooth) Myanmar: 2400~2483.5MHz ≤ 20dBm(EIRP); 5150~5350MHz ≤ 23dBm(EIRP); 5470~5725MHz ≤ 30dBm(EIRP); 5725~5850MHz ≤ 30dBm(EIRP);



Basic		
Operating Temperature	-10 °C to +45 °C (14 °F to 113 °F)	
Operating Humidity	5% to 95% Noncondensing	
Certifications	CE,RoHS	
Wireless		
OFDMA	-	
MU-MIMO	✓	
BSS Coloring	-	
Maximum Number of SSIDs	6	
SSID Hiding	✓	
Band Steering	✓	
Guest Wi-Fi	✓	
WPA/WPA2	✓	
WPA3	-	
Roaming	Layer 2 Roaming	
Blacklist	✓	
Reyee Mesh	✓	
Mesh Pairing by Hardware	✓	
Mesh Pairing by Mesh Button	✓	
Mesh Pairing by Eweb	✓	
Recommended Hop Count	≤2	
Wi-Fi Optimization	~	
QoS (WMM)	~	
WPS	~	
Transmission Power Adjustment	✓	

Hardware		
CPU	MT7628DAN	
Flash	16 MB	
RAM/SDRAM	64 MB	
Color	White	
System LED Indicator	✓	
Reyee Mesh LED Indicator	✓	
Reyee Mesh Button	✓	
Power Button	-	
Reset Button	✓	
DC Connector Dimensions	-	
	WAN	
Static IP	✓	
DHCP	✓	
PPPoE	✓	
Learning PPPoE Account & Password	✓	
VLAN Tagging	✓	
LAN		
DHCP Server	✓	
Client List	✓	
Static IP Assignment	✓	
Port-Based Flow Control	✓	
Features		
IPv6	-	

	Features
DDNS	-
IPTV	-
Alarm	-
Diagnosis	-
UPnP	-
ARP Binding	-
Port Mapping	-
DMZ Host	-
Rate Limitation of Terminals	-
Hardware Acceleration	-
MAC Address Cloning	✓
Cloud Management	✓
Repeater Mode	✓
WISP Mode	~
	Security
PPTP VPN Server	-
PPTP VPN Client	-
L2TP VPN Client	-
Parental Control	-
Protect TCP Flood Attacks	✓
Protect ICMP Attacks	-
Protect UDP Flood Attacks	-

System	
Default Access/Password	10.44.77.254 No Password Required by Default
URL Access	-
Local Upgrade	✓
Online Upgrade	✓
APP Upgrade	✓
Syslog	-
Backup	-
Factory Reset	✓
Language	Chinese English Vietnamese Indonesian Thai Arabic Traditional Chinese Spanish Russian

Package Contents

Model	RG-EW1200R
Wireless Extender	1
User Manual	1
Warranty card	1

Ruijie | 意Rcycc

Redefine your easy network



Ruijie Networks Co., Ltd Floor 11, East Wing, Zhongyipengao Plaza, No.29 Fuxing Road, Haidian District, Beijing China Website: https://www.ruijienetworks.com